

## BESTORQ LIGHTNING

V-Belts created for the most severe Lawn & Garden applications. Engineered and tested in Lincoln, NE and backed by 50+ years of professional L&G belt design, testing and application experience.




### BELT DETAILS

Lightning is created with an outer rubber impregnated fabric cover that is extremely tough, wear resistant and crack resistant. The low coefficient outer cover shows extreme resistance to belt turnover or roll; excellent for misaligned drives and for belts used as a clutch.

- long shelf life of at least 7 years, when stored out of the sun and in temperatures from 40F - 100F
- synthetic rubber throughout & High Modulus Low Shrink tensile member
- flexible design, but very stable on long drives or misaligned drives
- conforms to ARPM standard IP-23
- to be used with pulleys made to ARPM standards IP-23 or IP-20
- made to exceed OEM specifications
- very resistant to severe and repeated shock loads, and works well on "quarter turn" and "mule" drives
- great for Lawn & Garden equipment of all types, Ag Equipment and all types of industrial drives, especially where misalignment, clutching or backside idlers are present

### BELT LIFE

Belt life data is shown below. Belts were tested at over rated loads on minimum diameter pulleys, with backside idlers at 3600 RPM.

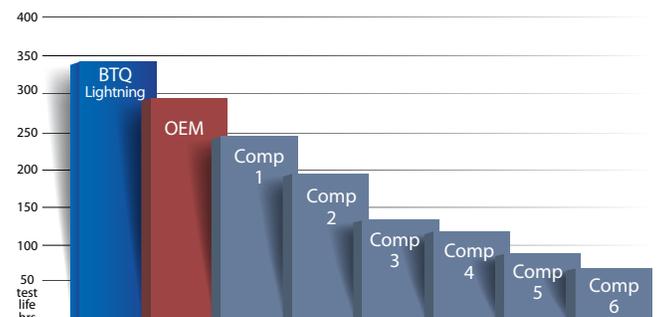

### AVAILABLE TO ORDER

Available in popular widths 3/8", 1/2", and 5/8" and in the following lengths:

- 3/8" from 17" to 60"
- 1/2" from 16" to 280"
- 5/8" from 21" to 380"
- many popular half sizes are available