


GENERAL TECHNICAL INFORMATION

Single wrapped construction HEX BELTS, AA, BB, CC:

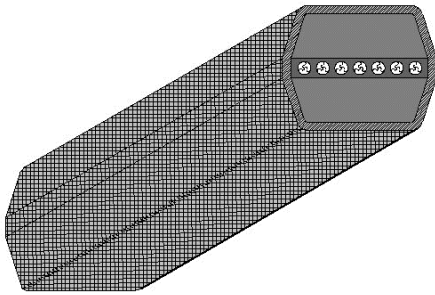

BESTORQ wrapped hex belts give premium belt performance. The belts are constructed of highly engineered, high performance components. The components are manufactured using the latest in belt technology available on a global basis.

All belts of a size are manufactured to run as a matched set, i.e. any BESTORQ BB112 belt will run as a matched set with any other BESTORQ BB112 belt.

The outer fabric wrap is treated with highly oil and heat resistant, engineered synthetic rubber compound, specifically compounded for excellent wear resistance, proven through thousands of hours of testing.

The helically wound tensile cords are specially engineered, twisted, heat and chemically set, polyester material. Testing has proven that the tensile decay properties of BESTORQ Cord are truly World Class.

The body rubber compound is a highly engineered synthetic rubber compound, specially compounded for cool running, flexibility, crack resistance, and excellent bonding to the outer fabric and tensile cords.

The belts exceed USA RMA published ratings levels. They are designed to perform at the identical or higher level than all other major USA Manufacturer's belts of the same type. All AA, BB, and CC belts are manufactured to meet RMA standards for length and dimensions. All belts of a given size are manufactured to run interchangeably in a matched set.

Dimensions:

	<u>Center Width</u>	<u>Thickness</u>	<u>Angle</u>
AA	.50"	.42"	40
BB	.66"	.54"	40
CC	.87"	.67"	40

